


TIMING: NS
OPTIONAL KNOB TYPE
CG 2-7
CGA 2-7

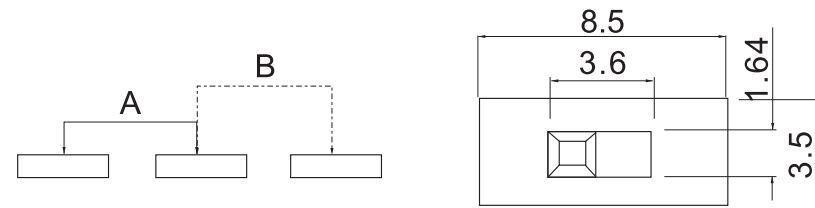


主要技术参数、性能
The Main Thchnology Performance

额定电流、电压 Rate voltage current	See detail spec
接触电阻 Contact resistance	50mΩ Max
绝缘电阻 insulated resistance	100mΩ Min
电寿命 Electrical Life	10,000 Cycles (Min)
使用温度 Service temperature	-25°C+ 80 °C
使用湿度 Ambient humidity used	≤85%RH
机械寿命 Mechanical Life	10,000 Cycles (Min)
耐焊温度 Withstand Soldering temperature	260°C ± 5°C 3S

E				
D				
C				
B				
A				
项目 ITEM	名称 DESCRIPTION	材质 MATERIAL	数量 QYT	表面处理/颜色 FINSH/COLOR

					第一视角 FIRST VIEW	一般公差 GENERAL TOLERANCE	
标记 SING	处数 FREQUENCY	更改文件号 REVISION	签名 APPROVED	日期 DATE	比列 SCALE	单位 UNIT	重量 WELGHT
设计 DESIGN	Zhaoming				mm	0.5~2	±0.10
审核 CHECKED	Zengyong					2~5	±0.15
批准 APPROVED	Fuyunfeng					5~10	±0.20
						角度 ANGLE	±0.5°

名称/NAME: 拨动开关 TOGGLE SWITCH SERIES
型号/MODEL: SS-12D00(1P2T)
 三荣部品