

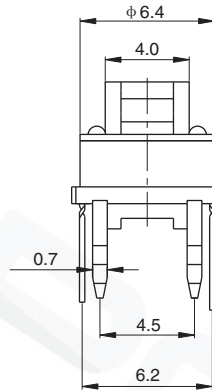


CIRCUIT



P.C.BLAYOUT

主要技术参数、性能

The Main Thchnology Performance

额定电流、电压 Rate voltage current	12V DC,50mA
接触电阻 Contact resistance	$\leq 100\text{m}\Omega$. MAX
操作力 Operating force	180 \pm 50 gf for 250 \pm 50 gf
耐焊规格 Solder Specifications	260 $^{\circ}$ C for 3 Seconds
绝缘电阻 insulated resistance	$\geq 100\text{m}\Omega$. MIN
寿命 Endurance	200,000 cycles
使用温度 Service temperature	-20 $^{\circ}$ C to 70 $^{\circ}$ C
总行程 TOTAL TRAVEL	0.25 \pm 0.1mm

E				
D				
C				
B				
A				
项目 ITEM	名称 DESCRIPTION	材质 MATERIAL	数量 QYT	表面处理/颜色 FINSH/COLOR

						第一视角 FIRST VIEW		名称/NAME: 带灯开关 ILLUMINATED TACT SWITCH SERIES		
								型号/MODEL: TS01-003L (Switch LED)		
标记 SING	处数 FREQUENCY	更改文件号 REVISION	签名 APPROVED	日期 DATE	比列 SCALE	一般公差 GENERAL TOLERANCE				
设计 DESIGN		Zhaoming			单位 UNIT	mm	0.5~2			± 0.10
审核 CHECKED		Zengyong			重量 WELGHT		2~5			± 0.15
批准 APPROVED		Fuyunfeng			角度 ANGLE		5~10			± 0.20
								$\pm 0.5^{\circ}$		